

Self-Cleaning Filters

DELTA-STRAIN 1920-S/L

For hydrous, viscous and super-viscous media

The wedge-wire filter from DELTAFILTER is a logic, cost-efficient and environmental-protecting way of filtration.

- No cartridge filters waste
- Self-cleaning without interruption of process
- Robust and user-friendly filter housing in two parts with segment-screw clamps
- Low operating costs due to a long service life
- No special spare part stockholding is necessary
- Simple and time-saving maintenance – no dismantling of pipelines
- Internal filter parts are removable upwards
- Filter rates nominal 25 µm – 8000 µm
- Manufacturing acc. to PED 2014/68/EU
- Motor in efficiency class IE3 (High Efficiency)

OPTIONS

⊕ Protection ATEX-conformable acc. to directive 2014/34/EU, perforated elements for gel-like particles, fibres, algae etc., filter elements in hardened design for lifetime improvement, spring loaded scraper blade, self-re-stressed gland unit, special voltage, special seals, automatic drain-system, mechanical seals, sluices, heating jacket, differential pressure indicator, TÜV acceptance etc.



DELTA-STRAIN 1920-S/L,
1.4571, 10 bar

We manufacture self-cleaning filters in special construction and alternative material!

PRODUCT DESCRIPTION

The filter housing, constructed in two parts, has a cover with motor-holder and gear-motor demountable upwards. The closure of housing occurs with segment-screw clamps. The filter system of DELTAFILTER Filtrationssysteme GmbH is extremely robust and designed for extreme applications. The filter elements with cleaning-system can be dismantled upwards as one unit without special tools. The dirt is removed of the filter element by four flexible scraper-blades of stainless steel and sinks downwards in the mud reservoir of the sump. The dirt can be discharged by a manual valve or optional by an automatic cut off device, which can be controlled by the time or by the differential pressure. Liquid losses are limited. Sluices can be delivered optionally for the concentration of the dirt. The standard type of the filter housing has two dummy sheets.

TECHNICAL DATA


Design and calculations:	PED 2014/68/EU, AD2000
Material of housing:	1.4571 (316Ti) ^{1,2}
Material of filter element:	1.4435 (316L), 1.4404 (316L), 1.4571 (316Ti)
Material of other internals:	1.4571 (316Ti), 1.4310 (301)
Max. allowable pressure:	10 bar ¹
Max. allowable temperature:	80°C ¹
Housing seal:	O-ring FPM ¹
Filter rates nominal:	25 µm – 8000 µm ³
Weight (empty):	ca. 225 kg
Drive:	gear-motor
Motor data:	400 V, 50 Hz, 180/250 W ¹
Motor protection:	IP65 ¹
Flow capacity:	144 m ³ /h (50 µm) 180 m ³ /h (100 µm) 250 m ³ /h (≥150 µm)
(in relation to clean water)	

CONNECTIONS

S1 Inlet	DN200, PN16, form B1 ⁴
S2 Outlet	DN200, PN16, form B1 ⁴
S3 Discharge	DN80, PN16, form B1 ⁴
S4 Ventilation	BSP 3/8" with ball-valve and hose nipple ⁴
S5 Differential pressure (+)	BSP 1/4" inner thread ⁴
S6 Differential pressure (-)	BSP 1/4" inner thread ⁴

Illustration, weights and measures are only indices.

DELTA-STRAIN 1920-S/L

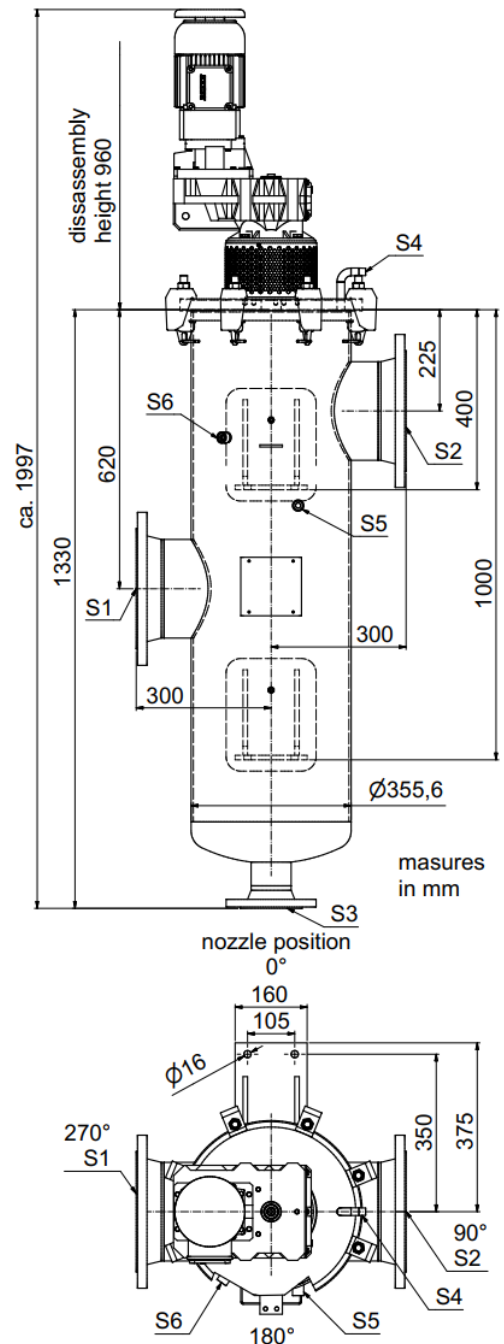

- ¹ Optional other materials, pressures, temperatures, voltages, protection ratings etc.
- ² Surface pickled and passivated
- ³ Optional perforated elements (gel-like particles, fibres, algae etc.)
- ⁴ Optional with threaded port, (ANSI-) flanges or welding male part according to German DIN 11851

Our self-cleaning filters model DELTA-STRAIN are available for flow capacities up to 250 m³/h as standard versions – higher flow capacities on request.

We will prepare a detailed quotation for you. Test filters are available.

21st March 2024 - Technical changes reserved.



Certified acc. to
ISO 9001:2015

Phone +49 / 62 32 / 31 51 31
Fax +49 / 62 32 / 31 51 35

Email info@deltafilter.com
Web www.deltafilter.com